

# INSTRUCTIONS

## COMPOSITE LED FLOOD

10W: 4646.10.30.30	30W: 4646.30.30.30
10W: 4646.10.40.30	30W: 4646.30.40.30
50W: 4646.50.30.30	100W: 4646.100.30.30
50W: 4646.50.40.30	100W: 4646.100.40.30

Please read the instructions before commencing installation and retain for future reference.

### SPECIFICATIONS:

- **Fitting:** ASA body, tempered glass diffuser, 316 stainless steel bracket and 6063 grade aluminium heatsink.
- **Lamp types:**  
10W/30W/50W/100W Natural White 4000K  
10W/30W/50W/100W Warm White 3000K
- **Protection against electric shock:** CLASS I. Requires earth connection.
- **Ingress Protection:** IP65. Complete protection against the entry of dust and against water jets.
- **Ballast:** Built in LED driver.
- **Quality/Corrosive rating:** Suitable for coastal Installation, commercial use and indoor/outdoor applications.
- **Ambient temperature range:** -8°C to +55°C.

### INSTALLATION INSTRUCTIONS:

**⚠** Electrical products can cause death, injury, damage to property. Installation of this product must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.

Ensure mains supply is switched off.

- Select a suitable mounting position. (Fig. 1)
- With a suitable mounting position selected, securely fasten the U shape mounting bracket to the mounting surface. (Fig. 2)
- Connect the fitting to its electrical source in accordance to the SANS 10142 standard.(Fig 3)
- Switch on mains and adjust the fitting angle as required. (Fig. 4)

### WARNING:

- Ensure all items and screws are secure and fitted correctly



### COMPOSITE LED FLOOD

Fig.1



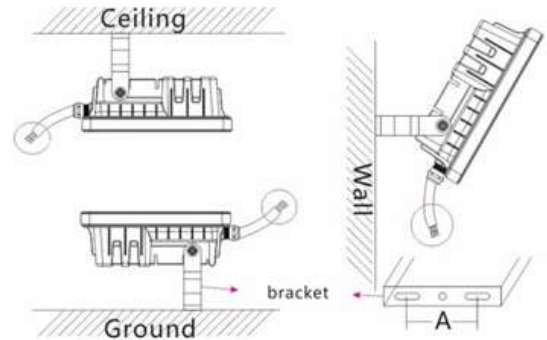


Fig.2

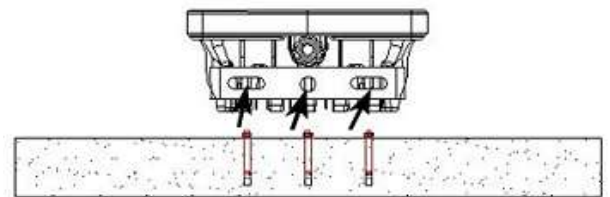


Fasten the U shaped bracket.

Fig.3

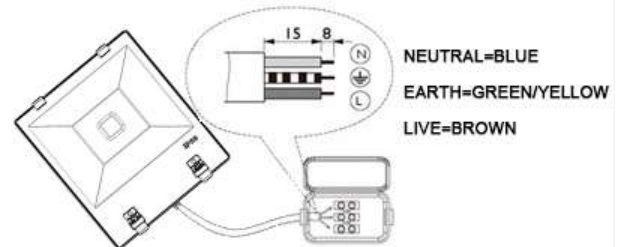

Connect the fitting to its electrical source.

Fig.4

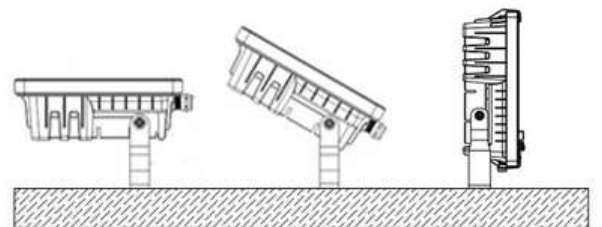

Adjust the fitting angle as required.